

# HIOKI

## MEMORY HILOGGER LR8450

**Test Equipment  
Depot**  
1-800-517-8431

99 Washington Street  
Melrose, MA 02176  
Phone 781-665-1400  
Toll Free 1-800-517-8431

Visit us at [www.TestEquipmentDepot.com](http://www.TestEquipmentDepot.com)



## Wireless data logging at 1 ms

330-channel portable logger available with  
your choice of plug-in and wireless units

**Voltage**  
1 ms sampling

**Strain**  
1 ms sampling

**Temperature**  
10 ms sampling

**Humidity**  
10 ms sampling

**Resistance**  
10 ms sampling



# Two models: basic and wireless



## Standard model (designed for use with plug-in units only) LR8450

Gain up to 120 channels of input simply by adding a total of four plug-in units

Example unit configuration: 120 channels

### Plug-in units

VOLTAGE/TEMP UNIT U8552 × 4



Each VOLTAGE/TEMP UNIT U8552 accepts 30 channels of input. Add four units for 120 channels of measurement.

## Wireless LAN model

Add channels freely via either plug-in or wireless units

Can also be used exclusively with wireless units.



## Wireless LAN model LR8450-01

Add a total of up to 7 wireless units for a maximum of 330 channels

Example unit configuration: 330 channels

### Plug-in units

VOLTAGE/TEMP UNIT U8552 × 4



### Wireless units

WIRELESS VOLTAGE/TEMP UNIT LR8532 × 7



With four U8552 VOLTAGE/TEMP Units and seven LR8532 WIRELESS VOLTAGE/TEMP Units, you can measure a total of 330 channels.

## Mix plug-in and wireless units


Mix plug-in and wireless units to build a measurement system that suits your needs.



# Voltage measurement



Test hydraulic equipment

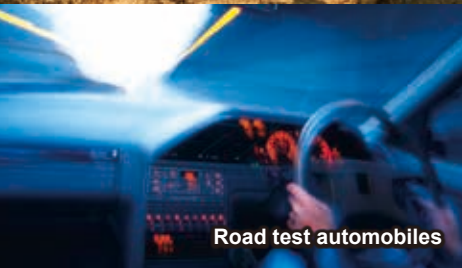

Road test automobiles

## Sample output from a variety of sensors, including 1 ms pressure sensors

A 1 ms sampling rate is the best match to measure sensor outputs with a frequency response of under 100 Hz, for example pressure and vibration sensors.



HIGH SPEED VOLTAGE UNIT U8553



WIRELESS HIGH SPEED VOLTAGE UNIT LR8533

# Temperature measurement



Automotive part temperature measurement



Battery temperature rise

## Measure temperature near inverters and batteries at a sampling rate of up to 10 ms



VOLTAGE/TEMP UNIT U8550  
UNIVERSAL UNIT U8551  
VOLTAGE/TEMP UNIT U8552(\*)




WIRELESS VOLTAGE/TEMP UNIT LR8530  
WIRELESS UNIVERSAL UNIT LR8531  
WIRELESS VOLTAGE/TEMP UNIT LR8532(\*)

\*Sampling rate of 10 ms is available when using 15 or fewer channels.

### Sample input at up to 1 ms

#### Consistent even when units are added

Each unit incorporates its own A/D converter. This design keeps the maximum sampling rate high even when units are added.



Example 1: Use four U8553 High Speed Voltage Units (with 5 channels each) to measure 20 channels at a sampling rate of 1 ms.

Example 2: Use four U8550 Voltage/Temp Units (with 15 channels each) to sample 60 channels at a sampling rate of 10 ms.

### Noise resistance

#### Consistent even when units are added

Since increasing the number of units has no effect on the cutoff frequency, which changes with the sampling rate, power supply noise can be reduced without sacrificing noise resistance.

(ex.) Sampling rate: 1 s

| Number of channels | Cutoff frequency |
|--------------------|------------------|
| 1ch to 15ch        | 60 Hz            |
| 16ch to 30ch       | 60 Hz            |
| 31ch to 45ch       | 60 Hz            |
| 46ch to 60ch       | 60 Hz            |

\*When using a power supply frequency of 60 Hz.

Same cutoff frequency

### Set filters

#### Set filters for each unit



The cutoff frequency, which varies with the data refresh interval, can be set separately for each unit. You can use long data refresh intervals, which boost filter effectiveness, and short data refresh intervals for different units at the same time.

- Measure control signals at maximum speed: Unit 1 (data refresh interval: 1 ms)
- Measure battery voltage fluctuations: Unit 2 (data refresh interval: 1 ms)
- Measure temperature using thermocouples: Unit 3 (data refresh interval: 1 s) with **strong filter**

# Strain measurement

## Measure strain with a 1 ms sampling rate

Connect strain gages directly and measure at a sampling rate of up to 1 ms. Strain gages tend to have long, thin wires that are easily broken, but that potential pitfall can be avoided by using wireless units so that wire length is minimized.




STRAIN UNIT U8554



WIRELESS STRAIN UNIT LR8534

## Connect strain gages directly


The Strain Unit has a built-in bridge box, allowing you to connect strain gages directly to its input terminals.

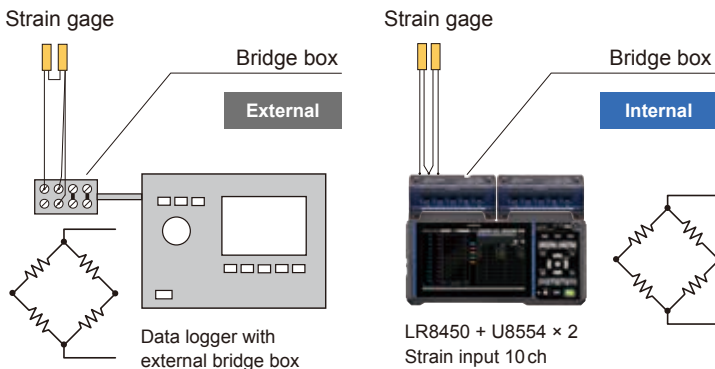

Strain gage-type converters such as load sensors and pressure sensors can be connected directly and used in measurement.



Stress and load on moving parts

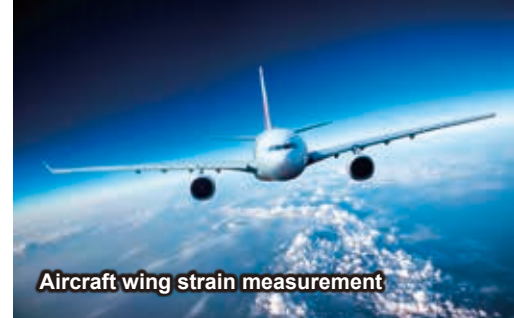

Aircraft wing strain measurement



Brake and pipe strain measurement




Pipe strain measurement

### Reduced effects of noise

## Stable measurement, even at high voltages and frequencies

Legacy models were incapable of measuring temperature accurately in noisy environments due to the effects of high frequencies, which caused values to shift or fluctuate significantly. The LR8450 uses a revamped design to dramatically reduce the effects of high-frequency noise.

Example: Measure temperature by connecting the tip of a K thermocouple to the screw on an inverter's PWM output terminal (W-phase) when using the Voltage/Temp Unit U8550 (settings: 100 ms sampling in the 100°C f.s. range).

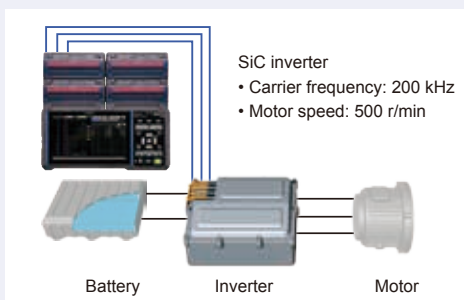

Legacy models exhibit significant fluctuations when the inverter is operating, but the LR8450 does not.



# Wireless connectivity for exceptional ease of use

## Collect data from dispersed locations all at the same time

The LR8450-01 can simultaneously collect measurement data from wireless units installed on different pieces of test equipment.

Collect measurement data from multiple locations with a single logger

Manage data as a single time sequence

Units can be placed in confined locations

Check the display during measurement



30m  
(line of sight)



Install wireless units in testing equipment

## Peace of mind in the event of an interruption in power or wireless connectivity

Peace of mind if communications are temporarily interrupted

**Buffer memory holds up to 5 min.\*1 of measurement data**

Each wireless unit has a built-in buffer memory that can hold up to 5 min.\*1 of measurement data. Data is re-sent along with more recent measurement data once communications resume, after which it is restored inside the LR8450-01\*2.

The system can be configured to output an alarm if communications are interrupted or if a unit encounters a low-battery state.

\*1 The duration for which measurement data can be maintained does not vary with the recording interval (up to a maximum of 5 min.)

\*2 Data collected using the Logger Utility software measurement cannot be restored in this manner.

Battery operation are temporarily interrupted

**Use units in locations where there's no AC power**

Example:

The wireless Voltage/Temp unit LR8530 can operate for about 9 hours on battery power. If the unit is charged at night, it can operate on the battery pack alone during the day.

Using the Battery Pack Z1007

| Wireless unit model | Continuous operating time |
|---------------------|---------------------------|
| LR8530              | Approx. 9 hr.             |
| LR8531              | Approx. 7 hr.             |
| LR8532              | Approx. 9 hr.             |
| LR8533              | Approx. 9 hr.             |
| LR8534              | Approx. 5 hr.             |



Peace of mind in the event of a power outage during measurement interrupted

**Install a battery pack for peace of mind**

If you've installed a battery pack in a unit that's being powered by an AC adapter, the unit will automatically switch to battery power in the event of an outage so that the LR8450-01 can continue making measurements. (Data would otherwise be lost during the outage.)

## Make measurements in locations where it would be difficult to route wires

Work time can be reduced by using the LR8450-01 and wireless units, since only minimal wiring is required. If the measurement target is located in a lab, this approach eliminates the need to string wire and drill holes in the walls of the monitoring room where data is checked.

Install in a closed vehicle when you need to separate the internal and external environments




## Simple registration of wireless units

Wireless units located within range that are not connected to another LR8450-1 are automatically detected. Simply choose the unit you wish to register from a list.



## Wireless LAN channel selection and channel monitor

You can reduce interference with other wireless devices by using an open channel. Check for open channels on the instrument's screen.

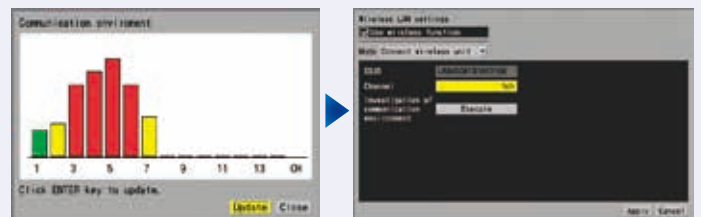


## Observe data from a remote location using a PC or tablet

By connecting the LR8450-01 to a PC or tablet via a wireless LAN, you can control the instrument remotely using the built-in HTTP server or download data files using the built-in FTP server.

### Station mode

Connect wirelessly to a third-party access point (AP).

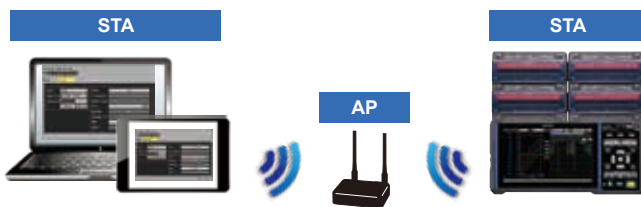


### Access point mode

Connect wirelessly directly to a PC.



# Easy-to-understand presentation of measured values

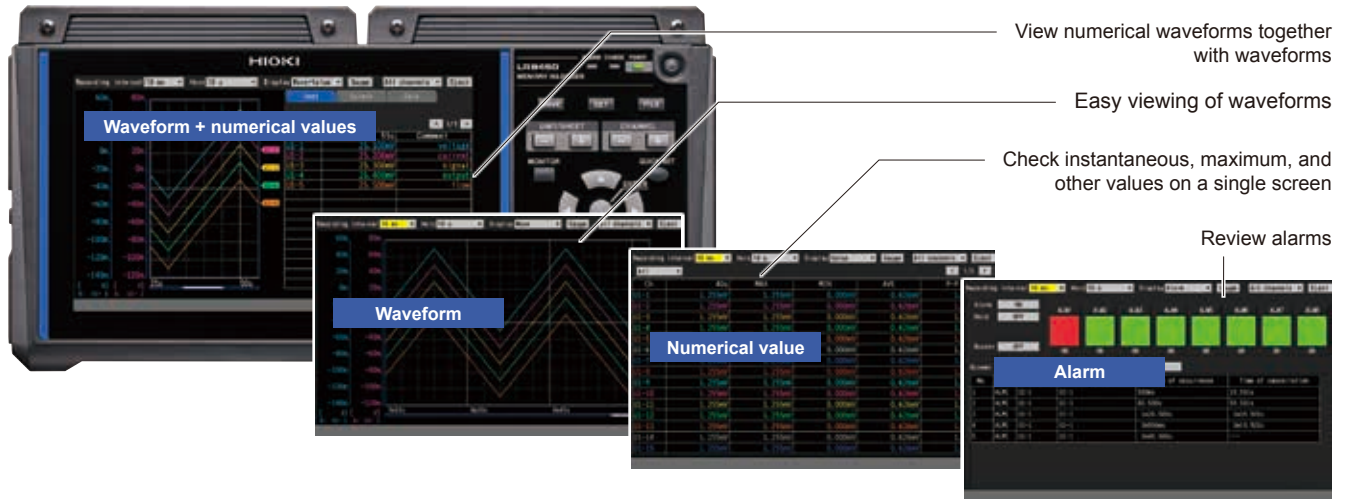


# External control terminals and interfaces to accommodate a broad range of use cases



Motor speed, flow rate integration, etc.


## 8-channel pulse measurement

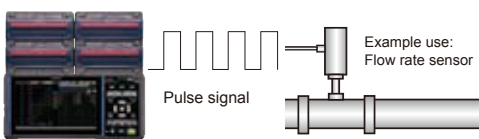

In "Revolve" mode, monitor production equipment by measuring the variations in revolution speed of motors or drills. In "Count" mode, identify operation status by acquiring integrated power or flow rate.

Two voltage output terminals (5, 12, or 24 V)


## Sensor power supply functionality

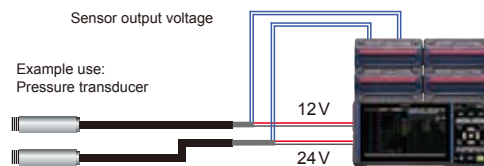

The LR450/LR450-01 provides two voltage output terminals, each of which can supply a 100 mA current, eliminating the need for a separate sensor power supply. Select 5, 12, or 24 V for the VOUTPUT1 terminal and 5 or 12 V for the VOUTPUT2 terminal.

Useful in preventive maintenance

## 8-channel alarm output

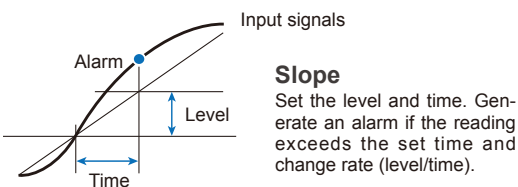

Configure eight channels of alarm output. You can set level, window, slope, and logic pattern alarms for each channel you wish to monitor.

Replace media during real-time saving

## No need to stop recording

When you eject the storage media device while recording data, data remaining in the internal buffer memory will be written to a different file once another media device has been inserted.





## Extensive calculation functionality

### Numerical calculation

In addition to the maximum and minimum value calculation functions provided by legacy models, the LR8450/LR8450-01 offers an extensive range of calculations, including on/off time, count, and usage ratio.




#### Types of calculations

- Average value
- Peak-to-peak value
- Maximum value
- Minimum value
- Time at which maximum value occurred
- Time at which minimum value occurred
- Integration
- Aggregation
- Usage ratio
- On time
- Off time
- On count
- Off count

### Waveform calculation

Calculate data while measurement continues and display calculated waveforms in real time. Calculation results are saved on dedicated calculation channels that are distinct from measurement channels.

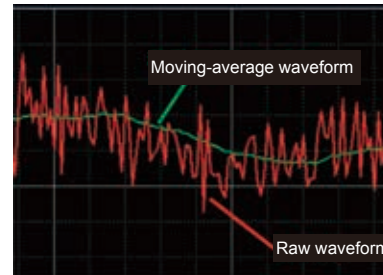


#### Types of calculations

- Basic arithmetic operations
- Aggregation
- Simple average
- Moving average
- Integration

## Repeat recording over extended periods of time without interruption

Collect data on storage media (SD memory card or USB drive) while measuring continues. The ability to segment files by hour or day without stopping measurement is convenient when you need to review data later.



### Maximum recording time (Rough estimate)

#### Example: Recording 2 units (30 analog) (no alarm output or waveform processing)

Because header portion of waveform files is not included in capacity calculations, expect actual maximum times to be about 90% of those in table. The maximum recording time varies with the number of measurement channels. Recording times are doubled if the number of measurement channels shown in the table is halved.

When recording 30 analog channels with two U8550/U8551 units or one U8552 unit (no alarm output or waveform processing)

When recording 30 analog channels with two LR8530/LR8531 units or one LR8532 unit (no alarm output or waveform processing)

| Recording intervals | Internal buffer memory (512 MB) | SD MEMORY CARD Z4001 (2 GB) | SD MEMORY CARD Z4003 (8 GB) | USB DRIVE Z4006 (16 GB) |
|---------------------|---------------------------------|-----------------------------|-----------------------------|-------------------------|
| 10 ms               | 1 d                             | 3 d 20 h                    | 15 d 8 h                    | 30 d 12 h               |
| 100 ms              | 10 d 8 h                        | 38 d 18 h                   | 153 d 9 h                   | 305 d 5 h               |
| 1 s                 | 103 d 13 h                      | 387 d 12 h                  | 1533 d 21 h                 | 3052 d 9 h              |
| 10 s                | 500 d                           | 3875 d 6 h                  | 15339 d 3 h                 | 30523 d 19 h            |

When recording 20 channels with four U8553 or U8554 units (no alarm output or waveform processing)

When recording 20 channels with four LR8533 or LR8534 units (no alarm output or waveform processing)

| Recording intervals | Internal buffer memory (512 MB) | SD MEMORY CARD Z4001 (2 GB) | SD MEMORY CARD Z4003 (8 GB) | USB DRIVE Z4006 (16 GB) |
|---------------------|---------------------------------|-----------------------------|-----------------------------|-------------------------|
| 1 ms                | 3 h 43 m                        | 13 h 56 m                   | 2 d 7 h                     | 4 d 13 h                |
| 10 ms               | 1 d 13 h                        | 5 d 19 h                    | 23 d                        | 45 d 18 h               |
| 100 ms              | 15 d 12 h                       | 58 d 3 h                    | 230 d 2 h                   | 457 d 20 h              |
| 1 s                 | 155 d 8 h                       | 581 d 7 h                   | 2300 d 21 h                 | 4578 d 13 h             |
| 10 s                | 500 d                           | 5813 d 1 h                  | 23008 d 20 h                | 45785 d 20 h            |

When recording 330 channels with four U8552 and seven LR8532 units (no alarm output or waveform processing)


| Recording intervals | Internal buffer memory (512 MB) | SD MEMORY CARD Z4001 (2 GB) | SD MEMORY CARD Z4003 (8 GB) | USB DRIVE Z4006 (16 GB) |
|---------------------|---------------------------------|-----------------------------|-----------------------------|-------------------------|
| 20 ms               | 4 h 8 m                         | 15 h 28 m                   | 2 d 13 h                    | 5 d 2 h                 |
| 100 ms              | 20 h 42 m                       | 3 d 5 h                     | 12 d 18 h                   | 25 d 10 h               |
| 1 s                 | 8 d 15 h                        | 32 d 6 h                    | 127 d 19 h                  | 254 d 8 h               |
| 10 s                | 86 d                            | 322 d 16 h                  | 1277 d 23 h                 | 2543 d 9 h              |

# Control the instrument remotely and capture data on a PC

## HTTP server function

### Control the instrument remotely from a PC

Use a standard browser such as Internet Explorer® to control the LR8450/LR8450-01, start and stop measurement, and enter comments.

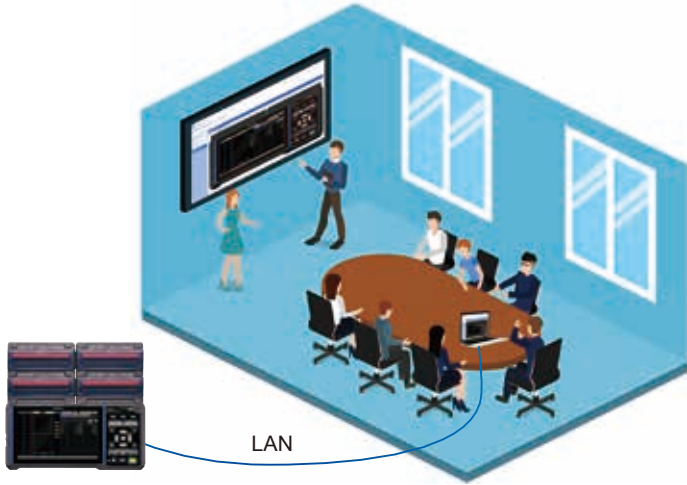

## FTP server function

### Download data files onto a computer

Download files on an SD memory card or USB drive that's connected to the LR8450/LR8450-01 to a computer.

## FTP client

### Automatically transfer data files to an FTP server

Automatically upload files that were saved automatically on an SD memory card or USB drive in the LR8450/LR8450-01 to an FTP server.

## NTP client function


### Set the logger's clock

You can set the LR8450's clock using a network-connected NTP server.

# Collect data in real time on a computer

## Collect data using the Logger Utility

Record data on a computer in real time using the Logger Utility application, a standard accessory. You can even scroll waveforms backwards (to view older data) while recording is in progress. Real-time measurement is supported for recording intervals of 10 ms or greater.

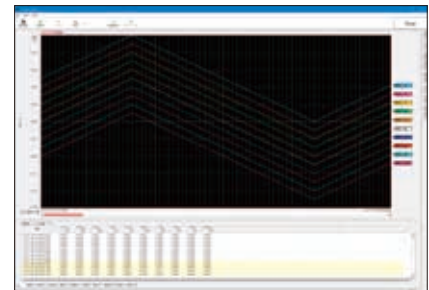


Logger Utility

## Collect data using GENNECT



For an up-to-date list of products supported by GENNECT One, see Hioki's website.

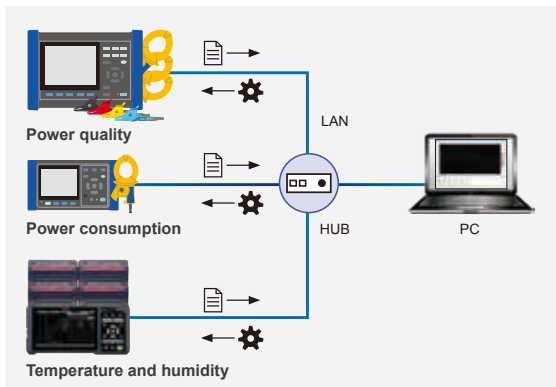

### Remote control (HTTP)


Control instruments remotely and change settings from a LAN-connected PC.

### Automatic file transfer (FTP)

This function lets you acquire data in real time on a PC, including data created when the instrument's trigger is activated and measurement files that are automatically generated on a daily basis. Example uses include capturing abnormal phenomena with an instrument installed in the field and automatically acquiring daily power consumption data on a PC.

### Real-time measurement (logging)

- Regularly (as quickly as once every second) collect measurement data from up to 15 LAN-connected measuring instruments and display it on a computer.
- Simultaneously capture power data from a power meter and temperature or HUB flow rate data from a data logger.

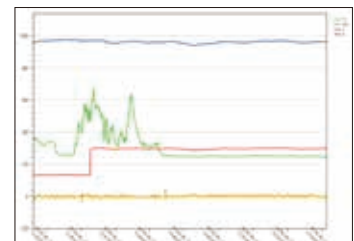

- 1 Download the GENNECT One SF4000 software from the Hioki website to your PC
- 2 Connect each measuring instrument to PC with LAN cable

## Specifications

| LR8450, LR8450-01 Memory HiLogger                                                        |                                                                                                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General specifications, Basic specifications                                             |                                                                                                                                                                                                                                                                                           |
| Product warranty period                                                                  | 3 years                                                                                                                                                                                                                                                                                   |
| Accuracy guarantee period                                                                | 1 year                                                                                                                                                                                                                                                                                    |
| Maximum number of connectable modules                                                    | 4 plug-in modules + 7 wireless modules*<br>* LR8450-01 only                                                                                                                                                                                                                               |
| Connectable modules (Plug-in modules)                                                    | U8550 Voltage/Temp Unit<br>U8551 Universal Unit<br>U8552 Voltage/Temp Unit<br>U8553 High Speed Voltage Unit<br>U8554 Strain Unit                                                                                                                                                          |
| Connectable modules (Wireless modules) (LR8450-01 only)                                  | LR8530 Wireless Voltage/Temp Unit<br>LR8531 Wireless Universal Unit<br>LR8532 Wireless Voltage/Temp Unit<br>LR8533 Wireless High Speed Voltage Unit<br>LR8534 Wireless Strain Unit<br>* Available at future firmware updates                                                              |
| Internal buffer memory                                                                   | Volatile memory, 256 Mwords                                                                                                                                                                                                                                                               |
| Clock functionality                                                                      | Auto-calendar, automatic leap year recognition, 24-hour clock                                                                                                                                                                                                                             |
| Clock precision (Precision of clock displayed by instrument as well as start/stop times) | ±1.0 s/day (at 23°C)<br>Time can be synchronized with an NTP server to which instrument is connected.                                                                                                                                                                                     |
| Time axis accuracy                                                                       | ±0.2 s/day (at 23°C)                                                                                                                                                                                                                                                                      |
| Backup battery service life                                                              | At least 10 years for clock (reference value at 23°C)                                                                                                                                                                                                                                     |
| Operating environment                                                                    | Indoors, Pollution Degree 2, altitude up to 2000 m                                                                                                                                                                                                                                        |
| Operating temperature and humidity range                                                 | -10°C to 50°C (14°F to 122°F), 80% RH or less (non-condensing)<br>(Charging temperature range: 5°C to 35°C)                                                                                                                                                                               |
| Storage temperature and humidity range                                                   | -20°C to 60°C (-4°F to 140°F), 80% RH or less (non-condensing)                                                                                                                                                                                                                            |
| Dimensions                                                                               | Without any modules: 272W × 145H × 43D mm (10.72"W × 5.71"H × 1.69"D) (excluding protrusions)<br>With 2 modules: 272W × 198H × 63D mm (10.71"W × 7.8"H × 2.78"D) (excluding protrusions)<br>With 4 modules: 272W × 252H × 63D mm (10.71"W × 9.92"H × 2.48"D) (excluding protruding parts) |
| Mass                                                                                     | Approx. 1108 g (39.08 oz.) (excluding battery pack)                                                                                                                                                                                                                                       |
| Standards                                                                                | Safety: EN61010<br>EMC: EN61326 Class A                                                                                                                                                                                                                                                   |
| Vibration resistance                                                                     | JIS D 1601:1995:1995 5.3 (1)<br>Class 1: Passenger vehicles; conditions: Class A equivalent                                                                                                                                                                                               |
| Accessories                                                                              | Quick Start Manual, LOGGER Application Disc (Quick Start Manual, Instruction Manual, Logger Utility, Logger Utility Instruction Manual, Communication Instruction Manual), USB Cable, AC Adapter Z1014, Precautions Concerning Use of Equipment that Emits Radio Waves (LR8450-01 only)   |

| Display                                             |                                                                                                                                          |
|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Display                                             | 7-inch TFT color LCD (WVGA 800 × 480 dots)                                                                                               |
| Display resolution (with waveform display selected) | Max. 20 divisions (horizontal axis) × 10 divisions (vertical axis)<br>(1 division = 36 dots [horizontal axis] × 36 dots [vertical axis]) |
| Display language                                    | Japanese, English, Chinese, Korean                                                                                                       |
| Backlight service life                              | Approx. 100,000 h (Reference value at 23°C)                                                                                              |
| Backlight saver                                     | Turns off backlight when no key is operated for a set amount of time.                                                                    |
| Backlight brightness                                | 5 levels (user-selectable)                                                                                                               |
| Waveform background color                           | Dark/light (user-selectable)                                                                                                             |

| Power supply              |                                                                                                                                                        |                                                                                                                                                                                                                                                               |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply              | AC adapter                                                                                                                                             | Z1014 AC Adapter (12 V DC ±10%)<br>AC Adapter rated supply voltage: 100 V to 240 V AC (assuming voltage fluctuation of ±10%)<br>AC Adapter rated power supply frequency: 50 Hz/60 Hz                                                                          |
|                           | Battery                                                                                                                                                | LR8450 accommodates 2 batteries<br>Z1007 Battery Pack<br>(When used with AC Adapter, AC Adapter has priority)<br>Li-ion, 7.2 V, 2170 mAh                                                                                                                      |
|                           | External power supply                                                                                                                                  | 10 V to 30 V DC                                                                                                                                                                                                                                               |
| Power consumption         | Normal power consumption                                                                                                                               | Using Z1014 AC Adapter or 12 V DC external power supply, without Battery Pack<br>With LCD at maximum brightness: 8.5 VA (instrument only)<br>With LCD backlight off: 7 VA (instrument only)                                                                   |
|                           | Maximum rated power                                                                                                                                    | When using the Z1014 AC Adapter<br>95 VA (including AC Adapter)<br>When using a 30 V DC external power supply<br>28 VA (while charging battery with LCD at maximum brightness)<br>When using the Z1007 Battery Pack<br>20 VA (with LCD at maximum brightness) |
| Continuous operating time | Battery                                                                                                                                                | With one Z1007 Battery Pack: Approx. 2 h (reference value at 23°C)<br>With two Z1007 Battery Packs: Approx. 4 h (reference value at 23°C)<br>Conditions: With one U8551 Universal Unit connected, backlight on, voltage output off, and Z4006 connected       |
| Charging functionality    | Charging is available when the Z1007 Battery Pack is attached and the AC Adapter is connected.<br>Charging time: Approx. 7 h (reference value at 23°C) |                                                                                                                                                                                                                                                               |

| Interface specifications                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The LAN interface and USB interface (function) cannot be used at the same time. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| LAN interface                                                                   | IEEE 802.3 Ethernet, automatic 100Base-TX/1000Base-T detection<br>Auto MDI-X, DHCP, DNS support<br>Connector: RJ-45<br>Maximum cable length: 100 m<br>LAN functionality:<br>Data acquisition, condition settings used with the Logger Utility software (supplied as standard)<br>Configuring settings and controlling recording using communications commands<br>Manually acquiring data using the FTP server (Acquiring files from a connected SD memory card or USB drive)<br>Automatically sending data via FTP (FTP client)<br>(Transferring files saved on a connected SD memory card or USB drive)<br>Remote operation using the HTTP server<br>Screen display and remote operation, starting and stopping measurement, acquiring data via FTP, setting comments, version update<br>NTP client function<br>Time synchronization with an NTP server<br>Regular synchronization intervals: 1 h, 1 day<br>Pre-measurement synchronization function                                                                                                                                                                                                  |
| Wireless LAN interface (LR8450-01 only)                                         | IEEE 802.11b/g/n<br>Communications range: 30 m, line of sight<br>Encryption function: WPA-PSK/WPA2-PSK, TKIP/AES<br>Usable channels: 1 to 11<br>Auto-connect function: Wireless LAN function can be toggled on and off.<br>Supported modes: Access point, station, wireless unit connectivity<br>Devices that can be connected in wireless unit connectivity mode: Wireless units or PC/tablet<br>Wireless unit and PC/tablet connectivity are exclusive.<br>Wireless LAN functionality:<br>Configuring settings and controlling recording using communications commands<br>Manually acquiring data using the FTP server<br>(Acquiring files from a connected SD memory card or USB drive)<br>Automatically sending data via FTP (FTP client)<br>(Transferring files saved on a connected SD memory card or USB drive)<br>Remote operation using the HTTP server<br>Screen display and remote operation, starting and stopping measurement, acquiring data via FTP, setting comments, version update<br>NTP client function<br>Time synchronization with an NTP server<br>Regular sync function: Every 1 hr. or 1 day<br>Pre-measurement sync function |
| USB interface (host)                                                            | Standard compliance: USB 2.0 compliant<br>Connectors: Series A receptacle × 2<br>Guaranteed-operation options: Z4006 USB drive (16 GB)<br>File system: FAT16, FAT32<br>Connectable devices: keyboard, mouse, hub (1 layer), USB drive (1 port only)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| USB interface (function)                                                        | USB standard: USB 2.0 compliant<br>Connector: Series mini-B receptacle<br>USB functionality: Data acquisition, condition settings used with the Logger Utility software (bundled)<br>Configuring settings and controlling recording using communications commands<br>USB drive mode: Transferring data from a connected SD memory card to a computer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| SD card slot                                                                    | Standard compliance: SD standard-compliant slot × 1 (with SD memory card/SDHC memory card support)<br>Guaranteed-operation options: Z4001 (2 GB), Z4003 (8 GB)<br>File system: FAT16, FAT32                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

| External control terminals |                                 |                                                                                                                                               |                                             |                                  |
|----------------------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|----------------------------------|
| Terminal block             | Push-button type terminal block |                                                                                                                                               |                                             |                                  |
| External I/O               | Number of terminals             | 4, Non-isolated (same GND as instrument)                                                                                                      |                                             |                                  |
|                            |                                 | Input                                                                                                                                         | Input voltage                               | 0 V to 10 V DC                   |
|                            |                                 |                                                                                                                                               | Slope                                       | Rising/falling (user-selectable) |
|                            | Functionality                   | Choose from off, start, stop, start/stop, trigger input, event input.                                                                         |                                             |                                  |
|                            | Output                          | Output format                                                                                                                                 | Open-drain output (with 5 V voltage output) |                                  |
|                            |                                 | Maximum switching capacity                                                                                                                    | 5 V to 10 V DC, 200 mA                      |                                  |
| Functionality              |                                 | Trigger output                                                                                                                                |                                             |                                  |
| Alarm output               | Output format                   | Open-drain output (with 5 V voltage output)                                                                                                   |                                             |                                  |
|                            | Maximum switching capacity      | 5 V to 30 V DC, 200 mA                                                                                                                        |                                             |                                  |
|                            | Number of terminals             | 8, Non-isolated (same GND as instrument)                                                                                                      |                                             |                                  |
| Voltage output             | Output voltage                  | Off, 5 V, 12 V, 24 V* (user-selectable)<br>Supply current: Max. 100 mA each<br>*: 24 V output can be selected for the VOUTPUT1 terminal only. |                                             |                                  |
|                            | Number of terminals             | 2, Non-isolated (same GND as instrument)                                                                                                      |                                             |                                  |
| GND terminal               | Number of terminals             | 10 (common GND)                                                                                                                               |                                             |                                  |



| Recording                 |                                                                                                                                                                                                                                                                                                                       |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recording mode            | Normal                                                                                                                                                                                                                                                                                                                |
| Recording intervals       | 1 ms*, 2 ms*, 5 ms*, 10 ms, 20 ms, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s, 5 s, 10 s, 20 s, 30 s, 1 min., 2 min., 5 min., 10 min., 20 min., 30 min., 1 h<br>*: Setting available only when using a module with data refresh intervals that include 1 ms                                                              |
| Data refresh interval     | Automatically- or user-selected value per module                                                                                                                                                                                                                                                                      |
| Repeat recording          | ON/OFF (user-selectable)                                                                                                                                                                                                                                                                                              |
| Specified time/continuous | Specified time: Recording time is set in days, hours, minutes, and seconds.<br>Time can be set up to maximum capacity of internal buffer memory. (Total 256 M)<br>Continuous: Recording is performed once until it is stopped. If maximum capacity of internal buffer memory is exceeded, memory will be overwritten. |
| Waveform recording        | Last 256 M data points are saved in internal buffer memory. Scroll through and view data stored in internal buffer memory. Alarm source data recording can be toggled on and off.                                                                                                                                     |
| Backup of recorded data   | None                                                                                                                                                                                                                                                                                                                  |

| Display                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sheet function                                | Display sheets can be switched between all channels and individual modules.<br>All-channel display sheet: Maximum 120 analog channels, 30 waveform calculation channels, 8 pulse/logic channels, 8 alarm channels                                                                                                                                                                                                                                                                         |
| Waveform display screen                       | Time-axis waveform display: Simultaneous display of gages and settings (channel representative settings and display settings)<br>Simultaneous display of time-axis waveforms and values: Instantaneous values, cursor values, or numerical calculation values (user-switchable)<br>Numerical display: Simultaneous display of instantaneous values and statistical values<br>Alarm display: Display of alarm status and alarm history                                                     |
| Display format                                | Time-axis waveform display: 1 screen                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Numerical display format                      | SI units, decimal, or exponent (user-selectable)<br>When decimal is selected, number of decimal places to display can be set (values will then be rounded to set number of places).                                                                                                                                                                                                                                                                                                       |
| Waveform colors                               | 24 colors                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Zooming in and out on the waveform display    | Horizontal axis: 2 ms to 1 day/division<br>Vertical axis: Number of divisions per screen: 10<br>Setting method: Select position or upper and lower limits for each channel. (Waveform calculation channels: upper and lower limits only)<br>When setting by position: Set zoom factor and zero position.<br>Zoom factor: 1/2x, 1x, 2x, 5x, 10x, 20x, 50x, 100x<br>Zero position: -50% to 150% (with a zoom factor of 1x)<br>When setting by upper/lower limit: Set upper and lower limit. |
| Waveform scrolling                            | Display can be scrolled left and right both during recording and while recording is stopped (during waveform rendering only).                                                                                                                                                                                                                                                                                                                                                             |
| Monitor display                               | Check instantaneous values and waveforms without recording data to memory (values and waveforms can be displayed while waiting for a trigger).                                                                                                                                                                                                                                                                                                                                            |
| Wireless unit status display (LR8450-01 only) | Indicates the battery remaining and the radio-wave strength, in the four levels, of the wirelessly connected modules.                                                                                                                                                                                                                                                                                                                                                                     |

| Files                                           |                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Save destinations                               | SD memory card/USB drive (user-selectable)<br>(Only storage media sold by HIOKI are guaranteed for operation)                                                                                                                                                                                                           |
| File names                                      | Up to 8 single-byte characters<br>Automatic numbering/dating (user-selectable)                                                                                                                                                                                                                                          |
| Auto saving                                     | Waveform data (real-time saving): Off, binary format, or text format (user-selectable)<br>Numerical calculation results (saved after recording): Off or text format (user-selectable)<br>When text format is selected, choose whether to save all calculations in one file or to save each calculation in its own file. |
| Delete and save                                 | On/Off (user-selectable)<br>Off: System will stop saving data when SD memory card or USB drive starts to run out of available space.<br>On: When SD memory card or USB drive starts to run out of available space, system will delete oldest waveform file (binary or text) and then continue saving data.              |
| Folder segmentation                             | No segmentation, 1 day, 1 week, or 1 month (user-selectable)                                                                                                                                                                                                                                                            |
| File segmentation                               | Enable/disable (user-selectable)<br>Disabled: Data for each recording session is saved in its own file.<br>Enabled: Data for each set period of time is saved in its own file, starting with the start of measurement.<br>Segmentation time: Day, hour, or minute (user-selectable)                                     |
| External media eject (SD memory card/USB drive) | External media can be ejected during real-time saving by activating a button on the screen and confirming a message.                                                                                                                                                                                                    |
| Data protection                                 | Yes (valid only when Z1007 Battery Pack is installed)<br>If remaining battery life declines during real-time saving, system will close file and stop saving data (although measurement operation will continue).                                                                                                        |
| Manual saving                                   | Data is saved when SAVE key is pressed.<br>Choose either selective save or immediate save as operation to perform when SAVE key is pressed.                                                                                                                                                                             |
| Decimation (text format only)                   | Decimate and save: Off or a value from 1/2 to 1/100,000 (user-selectable)                                                                                                                                                                                                                                               |

| Loading data       |                                                                                                |
|--------------------|------------------------------------------------------------------------------------------------|
| Loading saved data | Specify a position and then load up to 256 M data points of previously saved text-format data. |

| Calculations           |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Numerical calculations | Number of calculations | Up to 10 calculations simultaneously                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                        | Calculation content    | Average value, peak-to-peak value, maximum value, maximum value time, minimum value, minimum value time, integration <sup>*1</sup> , aggregation <sup>*1</sup> , moving average <sup>*2</sup> , on time <sup>*2</sup> , off time <sup>*2</sup> , on count <sup>*2</sup> , off count <sup>*2</sup><br><sup>*1</sup> : Total, positive, negative, or absolute value (user-selectable)<br><sup>*2</sup> : Threshold values can be set for individual channels. |
| Waveform calculations  | Calculation content    | Four arithmetic operations among channels<br>Moving average, simple moving average, aggregation, and integration of any channel<br>Calculated values are recorded as data for calculation channels (W1 through W30). (Calculations are performed at same time as measurement. Values cannot be recalculated after measurement.)                                                                                                                             |

| Triggers                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Trigger method           | Digital comparison method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Trigger timing           | Start, stop, or start & stop                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Trigger conditions       | AND/OR operation performed on trigger source, interval trigger, or external trigger<br>When triggers are disabled, free run                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Trigger sources          | Analog, pulse, logic, waveform calculations                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Trigger types            | Analog, pulse calculations: Level triggers: Trigger activated by rising or falling edge at set level<br>Window triggers: Set by trigger level upper limit and lower limit. Trigger activated when value leaves Area or when value enters area<br>Logic: Trigger activated when patterns of 1/0/X match (where "X" indicates either)                                                                                                                                                                                                           |
| Interval triggers        | Trigger activated for set recording interval after setting days/hours/minutes/seconds                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| External triggers        | Trigger activated by rising or falling edge at set level in external input signal. Rising/falling (user-selectable)                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Trigger response time    | When using plug-in units: (Recording interval or data refresh interval, whichever is longer) × 2 + 1 ms + analog response time <sup>*1</sup><br>When using wireless units (LR8450-01 only): (Recording interval or data refresh time, whichever is longer) × 2 + wireless response time <sup>*2</sup> + analog response time <sup>*1</sup><br><sup>*1</sup> : Depending on filter settings (U8554 with a data refresh interval of 5 ms and low-pass filter of 120 Hz).<br><sup>*2</sup> : When the radio-wave state is in good condition, 1s. |
| Trigger level resolution | Analog: 0.1% f.s. (f.s. = 10 divisions)<br>Pulse: Count 1c, rotational speed 1/n (where n = pulse count per rotation setting)                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Pre-triggers             | Set day/hours/minutes/seconds.<br>Can be set during real-time saving.                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

| Alarms                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Alarm conditions                | Set separately for ALM1 to ALM8<br>System will output an alarm when any of the following conditions are satisfied:<br>• AND/OR operation performed on alarm sources<br>• Low battery<br>• Thermocouple burnout<br>• Wireless error (LR8450-01 only)                                                                                                                                                                                                                                                                                               |
| Alarm sources                   | Analog, pulse, logic, waveform calculations                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Wireless error (LR8450-01 only) | Alarm output when a wireless communication error with a wireless module is detected<br>Off/Now/3 min. (user-selectable)<br>Now: Outputs an alarm upon a communications disruption<br>3 min.: Outputs an alarm if a communication disruption continues for 3 minutes.                                                                                                                                                                                                                                                                              |
| Low remaining battery life      | Alarm output when low remaining battery life is detected for the instrument or a wireless unit.                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Thermocouple burnout            | Alarm output when a thermocouple burnout occurs (when Tc burnout detection setting is enabled)                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Types of alarms                 | Analog, pulse, waveform calculations: Level: System will output an alarm following a rising or falling edge at set level<br>Window: Set upper limit and lower limit<br>System will output an alarm when value leaves area or when value enters area<br>Slope: Set level and time.<br>The system will output an alarm when the rate of change (level per unit time) continues to exceed the specified change rate during the set time interval.<br>Logic: System will output an alarm when patterns of 1/0/X match (where "X" indicates either)    |
| Alarm filter                    | Apply a filter to results of AND/OR operations performed on alarm sources. Set based on sample count (Off, 2 to 1000).<br>System will output an alarm if alarm state continues for set number of samples                                                                                                                                                                                                                                                                                                                                          |
| Alarm retention                 | On/Off (user-selectable)<br>Clear alarms: When alarm retention is On, alarms will be cleared without stopping recording.                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Alarm tone                      | On/Off (user-selectable)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Alarm output response time      | When using plug-in units: (Recording interval or data refresh interval, whichever is longer) × 2 + 1 ms + analog response time <sup>*1</sup><br>When using wireless units (LR8450-01 only): (Recording interval or data refresh interval, whichever is longer) × 2 + wireless response time <sup>*2</sup> + analog response time <sup>*1</sup><br><sup>*1</sup> : Depending on filter settings (U8554 with a data refresh interval of 5 ms and low-pass filter of 120 Hz).<br><sup>*2</sup> : When the radio-wave state is in good condition, 1s. |

| Other functionality                                |                                                                                                                                                                                                                           |                                                                                                              |
|----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Even mark function                                 | Number of inputs                                                                                                                                                                                                          | Up to 1000 inputs per measurement                                                                            |
| Waveform search function                           | Search waveforms and display target location in center of waveform screen.                                                                                                                                                |                                                                                                              |
|                                                    | Search conditions                                                                                                                                                                                                         | Search by choosing level, window, maximum value, minimum value, local maximum value, or local minimum value. |
|                                                    | Search range                                                                                                                                                                                                              | All data in internal buffer memory or data between A/B cursors (on vertical axis)                            |
|                                                    | Search targets                                                                                                                                                                                                            | Analog, pulse, logic, waveform calculations                                                                  |
| Jump function                                      | Specify event mark, A/B cursor position, trigger point, or waveform display position to display in center of waveform screen.                                                                                             |                                                                                                              |
| Cursor measurement function                        | Cursor display                                                                                                                                                                                                            | All channels or specified channels (user-selectable)                                                         |
|                                                    | Cursor movement                                                                                                                                                                                                           | A, B, or simultaneous (user-selectable)                                                                      |
|                                                    | Types of cursors                                                                                                                                                                                                          | Vertical or horizontal (user-selectable)                                                                     |
| Scaling function                                   | Scaling settings can be configured separately for each channel.                                                                                                                                                           |                                                                                                              |
| Comment entry function                             | Enter titles and channel-specific comments                                                                                                                                                                                |                                                                                                              |
| Start state retention function                     | On/Off (user-selectable)                                                                                                                                                                                                  |                                                                                                              |
| Auto-start function                                | On/Off (user-selectable)                                                                                                                                                                                                  |                                                                                                              |
| Auto setup function                                | Automatically loads settings saved on an SD memory card or USB drive when the instrument is turned on. If settings have been saved on both devices, the following order of precedence is used: SD memory card, USB drive. |                                                                                                              |
| Prevention of inadvertent START/STOP key operation | When START or STOP key is pressed, system will display a message asking if user wishes to start or stop measurement. Confirmation message: Enable/disable (user-selectable)                                               |                                                                                                              |
| Key lock function                                  | Disables operation keys                                                                                                                                                                                                   |                                                                                                              |
| Beep tone                                          | On/Off (user-selectable)                                                                                                                                                                                                  |                                                                                                              |
| Self-check function                                | Can check keys, LCD, ROM/RAM, LAN, media, and modules.                                                                                                                                                                    |                                                                                                              |
| Display of horizontal axis (time values)           | Horizontal axis (time value) display can be set to time, date, or data point count. Setting is applied when text data is saved.                                                                                           |                                                                                                              |
| Configuration navigation (Quick Set) function      | Wireless unit registration guide (LR8450-01 only), wireless connectivity troubleshooting guide (LR8450-01 only), Connection diagram display (Strain gage, external terminals)                                             |                                                                                                              |
| Power supply frequency filter function             | 50 Hz/60 Hz selection                                                                                                                                                                                                     |                                                                                                              |

| Input                                        |                                                                                                                                                                                                          |                    |                         |
|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------------------------|
| Pulse/logic input                            |                                                                                                                                                                                                          |                    |                         |
| Number of channels                           | 8 channels (common GND, non-isolated)<br>Exclusive setting for pulse/logic input for individual channels                                                                                                 |                    |                         |
| Terminal block                               | Push-button type terminal block                                                                                                                                                                          |                    |                         |
| Adaptive input format                        | Non-voltage contact, open collector (PNP open collector requires external resistor), or voltage input                                                                                                    |                    |                         |
| Maximum input voltage                        | 0 V to 42 V DC                                                                                                                                                                                           |                    |                         |
| Input resistance                             | 1.1 MΩ ±5%                                                                                                                                                                                               |                    |                         |
| Detection level                              | 2 levels (user-selectable)<br>High: 1.0 V or greater; low: 0 to 0.5 V<br>High: 4.0 V or greater; low: 0 to 1.5 V                                                                                         |                    |                         |
| Pulse input                                  |                                                                                                                                                                                                          |                    |                         |
| Measurement range, resolution                |                                                                                                                                                                                                          |                    |                         |
| Measurement target                           | Range                                                                                                                                                                                                    | Maximum resolution | Measurable range        |
| Count                                        | 1000 M pulse f.s.                                                                                                                                                                                        | 1 pulse            | 0 to 1000 M pulse       |
| Rotational speed                             | 5000/n (r/s) f.s.                                                                                                                                                                                        | 1/n (r/s)          | 0 to 5000/n (r/s)       |
|                                              | 300,000/n (r/min.) f.s.                                                                                                                                                                                  | 1/n (r/min.)       | 0 to 300,000/n (r/min.) |
| n: Number of pulses per rotation (1 to 1000) |                                                                                                                                                                                                          |                    |                         |
| Pulse input period                           | With filter off: 200 μs or greater (100 μs or greater during high and low interval)<br>With filter on: 100 ms or greater (50 ms or greater during high and low interval)                                 |                    |                         |
| Slope                                        | Set rising/falling for each channel.                                                                                                                                                                     |                    |                         |
| Measurement mode                             | Integration (addition, instantaneous), rotational speed                                                                                                                                                  |                    |                         |
| Integration                                  | Addition: Counts number of pulses input from start of measurement. Instantaneous: Counts number of pulses input within each recording interval (integrated value is reset for each rotational interval). |                    |                         |
| Rotational speed                             | r/s: Counts number of input pulses during 1 s and calculates rotational speed.<br>r/min.: Counts number of input pulses during 1 min. and calculates rotational speed.                                   |                    |                         |
| Smoothing function                           | Select value from 1 s to 60 s (valid only when set to rotational speed and r/min.).                                                                                                                      |                    |                         |
| Chatter prevention filter                    | Set to On/Off for each channel.                                                                                                                                                                          |                    |                         |
| Logic input                                  |                                                                                                                                                                                                          |                    |                         |
| Measurement mode                             | Records 1 or 0 for each recording interval.                                                                                                                                                              |                    |                         |

### Software Logger Utility specifications

|                       |                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Environment | Windows7(32bit/64bit)<br>Windows8(32bit/64bit)<br>Windows10(32bit/64bit)                                                                                                                                                                                                                                                                                              |
| Overview              | Control PC-connected logger to receive, display and save measured waveform data sequentially. (Total recording samples: maximum 10 million data. Data exceeding this number will be segmented into separate measurement files while recording continues.)<br>* Real-time measurement on the LR8450, LR8450-01 is possible with a recording interval of 10 ms or more. |

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Function               | Controllable loggers: 5<br>Data Collection System: 1 system<br>Display Format:<br>• Waveforms (split time-axis display is possible)<br>• Numerical values (logging) Numerical display can be enlarged<br>• Alarms<br>Above items can be displayed simultaneously<br>Numerical Value Monitor<br>Display: Display in a separate window is possible.<br>Scroll: Waveforms can be scrolled during measurement.                                                                                                                                                                                   |
| Data Collection        | Settings: Data collection settings of logger unit can be configured<br>Monitor function can be checked before measurement.<br>Save: Save settings from multiple devices supporting real-time measurement (LUS format) and measurement data (LUW format) as one file.<br>Data Save Destination: Real-time data collection file (LUW format), transfer data in real-time or non-real-time to Microsoft Excel®, Excel® template can be specified<br>Event Mark: Recording during measurement is possible                                                                                        |
| Waveform Display       | Supported Files: Waveform data file (LUW format, MEM format)<br>Display Format: Waveforms (split time-axis display available), Simultaneous display of numerical values (logging) available<br>Maximum Number of Channels: 2035 channels (measured) + 60 channels (waveform calculation)<br>Waveform Display Sheets: Waveform of each channel can be displayed on any of the ten sheets<br>Scroll: Available<br>Event Mark Recording: Available<br>Cursors: Cursors A and B can be used to display voltage values at cursor positions.<br>Hard Copy: Hard copy of waveform display available |
| Data Conversion        | Applicable Files: Waveform data file (LUW format, MEM format)<br>Conversion Section: All data, specified section<br>Conversion Format: CSV format (comma delimited, space delimited, tab delimited), transfer to Excel® sheet, LR5000 format (hrp2,hrp)<br>Data Thinning: Simple thinning with any thinning number                                                                                                                                                                                                                                                                           |
| Waveform Calculation   | Calculation items: Four arithmetic operations<br>Number of calculation channel: 60 channels                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Numerical Calculations | Applicable Data: Waveform data file (LUW format, MEM format), real-time measurement data, Waveform calculation<br>Calculation Items: Average value, peak value, maximum value, time to maximum value, minimum value, time to minimum value, On time, Off time, On count, Off count, standard deviation, aggregation, area value, and integration<br>Save calculation: Perform numerical calculation and save to file                                                                                                                                                                         |
| Search                 | Applicable Data: Real-time data collection file (LUW format), Main unit measurement file (MEM format), Waveform calculation data<br>Search Mode: Event mark, date and time, maximum position, minimum position, local maximum position, local minimum position, alarm position, level, window, and variation                                                                                                                                                                                                                                                                                 |
| Print                  | Applicable printer: Printer compatible to the OS in use<br>Applicable data: Waveform data file (LUW format, MEM format)<br>Print format: Waveform image, Report print, List print (Channel settings, Event, Cursor value)<br>Print area: All area, Specified area by A-B cursor<br>Print preview: Available                                                                                                                                                                                                                                                                                  |

### Option specifications (sold separately)

#### Plug-in units: U8550, U8551, U8552, U8553, U8554

#### Shared specifications

|                                          |                                                                         |
|------------------------------------------|-------------------------------------------------------------------------|
| Host model                               | LR8450/LR8450-01 MEMORY HiLOGGER                                        |
| Operating temperature and humidity range | -10°C to 50°C, 80% RH or less (non-condensing)                          |
| Storage temperature and humidity range   | -20°C to 60°C, 80% RH or less (non-condensing)                          |
| Vibration resistance                     | JIS D 1601:1995 5.3(1), Class 1A (passenger vehicle) equivalent         |
| Accessories                              | User manual, mounting screw × 2, wiring confirmation label (U8554 only) |

#### Wireless units: LR85530, LR8531, LR8532, LR8533, LR8534

#### Shared specifications

|                                          |                                                                                                                                                                                                        |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Host model                               | LR8450-01 MEMORY HiLOGGER                                                                                                                                                                              |
| Control communications method            | Connect wirelessly via Z3230 Wireless LAN Adapter (included).<br>Wireless LAN (IEEE 802.11b/g/n)<br>Range: 30 m (line of sight)<br>Encryption: WPA-PSK/WPA2-PSK, TKIP/AES<br>Channels: Channel 1 to 11 |
| Communications buffer memory             | 4 Mword (volatile memory)<br>Saves data in the event of a communications error. Data is re-sent when communications are restored.                                                                      |
| Operating temperature and humidity range | -20°C to 55°C, 80% RH (non-condensing)<br>(Charging temperature range: 5°C to 35°C)                                                                                                                    |
| Storage temperature and humidity range   | -20°C to 60°C, 80% RH (non-condensing)                                                                                                                                                                 |
| Vibration resistance                     | JIS D 1601:1995 5.3(1), Class 1A (passenger vehicle) equivalent                                                                                                                                        |
| LED display                              | Wireless connection and measurement status, error status, AC adapter/external power, battery power, charge status                                                                                      |
| Auto-connect function                    | Available                                                                                                                                                                                              |
| Accessories                              | Z3230 Wireless LAN Adapter, user manual, Z1008 AC Adapter, mounting plate, M3×4 screw × 2 (for use with mounting plate), wiring confirmation label (LR8534 only)                                       |

## Power supply specifications

|                           |                                                                                                                                                                                                                                                                                                                                     |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AC adapter                | Z1008 AC Adapter (12 V DC, standard accessory)<br>Rated supply voltage: 100 to 240 V AC<br>Rated power supply frequency: 50 Hz/60 Hz<br>Maximum rated power: 25 VA (including AC adapter)<br>Normal power consumption (instrument only, without battery pack)<br>LR8530, LR8532, LR8533: 2.5 VA<br>LR8531: 3.0 VA<br>LR8534: 4.0 VA |
| Battery                   | Z1007 Battery Pack (When using AC adapter, AC adapter takes precedence.)<br>Rated supply voltage: 7.2 V DC (Li-ion 2170 mAh)<br>Maximum rated power<br>LR8530, LR8532: 1.5 VA<br>LR8531, LR8533: 2.0 VA<br>LR8534: 3.5 VA                                                                                                           |
| External power supply     | Rated supply voltage: 10 to 30 V DC<br>Maximum rated power: 8 VA (30 V DC external power supply, while charging battery)<br>Normal power consumption (12 V DC external power supply, without battery pack)<br>LR8530, LR8532, LR8533: 2.5 VA<br>LR8531: 3.0 VA<br>LR8534: 4.0 VA                                                    |
| Continuous operating time | When using Z1007 Battery Pack (all data refresh rates, good communications state, 23°C reference values)<br>LR8530, LR8532, LR8533: Approx. 9 hr.<br>LR8531: Approx. 7 hr.<br>LR8534: Approx. 5 hr.                                                                                                                                 |
| Charging function         | When Z1007 Battery Pack installed while connected to AC adapter or 10 to 30 V DC external power supply<br>Charging time: Approx. 7 hr. (23°C reference value)                                                                                                                                                                       |

|                                |                                          |
|--------------------------------|------------------------------------------|
| <b>VOLTAGE/TEMP UNIT U8550</b> | <b>WIRELESS VOLTAGE/TEMP UNIT LR8530</b> |
| <b>UNIVERSAL UNIT U8551</b>    | <b>WIRELESS UNIVERSAL UNIT LR8531</b>    |
| <b>VOLTAGE/TEMP UNIT U8552</b> | <b>WIRELESS VOLTAGE/TEMP UNIT LR8532</b> |

(Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

## General specifications

|                                          |                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of input channels                 | U8550: 15 (Set voltage, thermocouple, or humidity for each channel)<br>LR8530: 15 (Set voltage or thermocouple for each channel)<br>U8551, LR8531: 15 (Set voltage, thermocouple, humidity, RTD, or resistor for each channel)<br>U8552: 30 (Set voltage, thermocouple, or humidity for each channel)<br>LR8532: 30 (Set voltage or thermocouple for each channel)                                                    |
| Input terminals                          | U8550, LR8530: M3 screw-type terminal block (2 terminals per channel)<br>U8551, LR8531: Push-button type terminal block (4 terminals per channel)<br>U8552, LR8532: Push-button type terminal block (2 terminals per channel)                                                                                                                                                                                         |
| Output terminals                         | M3 screw-type terminal block (1 output, 2 terminals, Z2000 Humidity Sensor power supply [can power up to 15 Z2000 Humidity Sensors]) (LR8531 only)                                                                                                                                                                                                                                                                    |
| Measurement target                       | U8550, U8552: Voltage, thermocouples, humidity<br>LR8530, LR8532: Voltage, thermocouples<br>U8551, LR8531: Voltage, thermocouples, humidity, RTD, resistor                                                                                                                                                                                                                                                            |
| Input type                               | Scanning by semiconductor relays<br>All channels isolated (Not isolated when measuring with temperature with thermocouple, resistance or humidity)                                                                                                                                                                                                                                                                    |
| A/D resolution                           | 16 bits                                                                                                                                                                                                                                                                                                                                                                                                               |
| Maximum input voltage                    | ±100 V DC (maximum voltage between input terminals without causing damage)                                                                                                                                                                                                                                                                                                                                            |
| Maximum channel-to-channel voltage       | 300 V DC (maximum voltage that can be applied between each input channel without causing damage; not isolated when measuring with RTD, resistance or humidity)<br>*Channels are isolated from each other with semiconductor relays. Never allow a voltage exceeding the product specifications, for example a lightning surge, to be applied across channels as doing so may cause the semiconductor relays to short. |
| Maximum rated terminal-to-ground voltage | 300 V AC, DC (maximum voltage that can be applied between input channels and the instrument or its chassis, or between units without causing damage; humidity measurement not isolated)                                                                                                                                                                                                                               |
| Input resistance                         | 10 MΩ or greater (10 mV f.s. to 2 V f.s. voltage ranges, thermocouple ranges, RTD and resistor ranges)<br>1 MΩ ±5% (10 V f.s. to 100 V f.s. voltage range, 1-5 V f.s. voltage range, humidity measurement)                                                                                                                                                                                                            |
| Allowable signal source resistance       | 1 kΩ or less                                                                                                                                                                                                                                                                                                                                                                                                          |
| Data refresh interval                    | 10 ms to 10 s (10 selectable levels)                                                                                                                                                                                                                                                                                                                                                                                  |
| Digital filters                          | Digital filter cutoff frequency is automatically set to data refresh interval, burnout setting, and power supply frequency filter setting                                                                                                                                                                                                                                                                             |
| Dimensions                               | U8550, U8551, U8552: Approx. 134W × 70H × 63D mm (5.28"W × 2.76"H × 2.48"D)<br>LR8530, LR8531, LR8532: Approx. 154W × 106H × 57D mm (6.06"W × 4.17"H × 2.24"D)                                                                                                                                                                                                                                                        |
| Mass                                     | U8550: Approx. 345 g (12.2 oz.), U8551: Approx. 318 g (11.2 oz.), U8552: Approx. 319 g (11.3 oz.), LR8530: Approx. 423 g (14.9 oz.), LR8531: Approx. 386 g (13.6 oz.), LR8532: Approx. 388 g (13.7 oz.), (including Z3230 Wireless LAN Adapter)                                                                                                                                                                       |
| Accessories                              | Instruction Manual, Installation screws × 2                                                                                                                                                                                                                                                                                                                                                                           |

## Analog input specifications

(23 ±5°C/73 ±9°F, 80% rh or less, after 30 minutes of warm-up and zero-adjustment, with the 50 Hz/60 Hz cut-off setting selected)

## Voltage

| Range       | Maximum resolution | Measurable range  | Measurement accuracy |
|-------------|--------------------|-------------------|----------------------|
| 10 mV f.s.  | 500 nV             | -10 mV to 10 mV   | ±10 μV               |
| 20 mV f.s.  | 1 μV               | -20 mV to 20 mV   | ±20 μV               |
| 100 mV f.s. | 5 μV               | -100 mV to 100 mV | ±50 μV               |
| 200 mV f.s. | 10 μV              | -200 mV to 200 mV | ±100 μV              |
| 1 V f.s.    | 50 μV              | -1 V to 1 V       | ±500 μV              |
| 2 V f.s.    | 100 μV             | -2 V to 2 V       | ±1 mV                |
| 10 V f.s.   | 500 μV             | -10 V to 10 V     | ±5 mV                |
| 20 V f.s.   | 1 mV               | -20 V to 20 V     | ±10 mV               |
| 100 V f.s.  | 5 mV               | -100 V to 100 V   | ±50 mV               |
| 1-5 V f.s.  | 500 μV             | 1 V to 5 V        | ±5 mV                |

## Temperature

Thermocouple (Not including accuracy of reference junction compensation)

Standards: JIS C1602-2015, IEC584

| Type        | Range       | Measurable range           | Measurable range           | Measurement accuracy       |        |
|-------------|-------------|----------------------------|----------------------------|----------------------------|--------|
| K           | 100°C f.s.  | 0.01°C                     | -100°C to less than 0°C    | ±0.7°C                     |        |
|             |             |                            | 0°C to 100°C               | ±0.5°C                     |        |
|             |             |                            | -200°C to less than -100°C | ±1.4°C                     |        |
|             | 500°C f.s.  | 0.05°C                     | -100°C to less than 0°C    | ±0.7°C                     |        |
|             |             |                            | 0°C to 500°C               | ±0.5°C                     |        |
|             |             |                            | -200°C to less than -100°C | ±1.4°C                     |        |
|             | 2000°C f.s. | 0.1°C                      | -100°C to less than 0°C    | ±0.7°C                     |        |
|             |             |                            | 0°C to less than 500°C     | ±0.5°C                     |        |
|             |             |                            | 500°C to 1350°C            | ±0.7°C                     |        |
|             | J           | 100°C f.s.                 | 0.01°C                     | -100°C to less than 0°C    | ±0.7°C |
|             |             |                            |                            | 0°C to 100°C               | ±0.5°C |
|             |             |                            |                            | -200°C to less than -100°C | ±0.9°C |
| 500°C f.s.  |             | 0.05°C                     | -100°C to less than 0°C    | ±0.7°C                     |        |
|             |             |                            | 0°C to 500°C               | ±0.5°C                     |        |
|             |             |                            | -200°C to less than -100°C | ±0.9°C                     |        |
| 2000°C f.s. | 0.1°C       | -100°C to less than 0°C    | ±0.7°C                     |                            |        |
|             |             | 0°C to 1200°C              | ±0.5°C                     |                            |        |
|             |             | -200°C to less than -100°C | ±0.9°C                     |                            |        |
| E           | 100°C f.s.  | 0.01°C                     | -100°C to less than 0°C    | ±0.7°C                     |        |
|             |             |                            | 0°C to 100°C               | ±0.5°C                     |        |
|             |             |                            | -200°C to less than -100°C | ±0.9°C                     |        |
|             | 500°C f.s.  | 0.05°C                     | -100°C to less than 0°C    | ±0.7°C                     |        |
|             |             |                            | 0°C to 500°C               | ±0.5°C                     |        |
|             |             |                            | -200°C to less than -100°C | ±0.9°C                     |        |
| 2000°C f.s. | 0.1°C       | -100°C to less than 0°C    | ±0.7°C                     |                            |        |
|             |             | 0°C to 1000°C              | ±0.5°C                     |                            |        |
|             |             | -200°C to less than -100°C | ±0.9°C                     |                            |        |
| T           | 100°C f.s.  | 0.01°C                     | -100°C to less than 0°C    | ±0.7°C                     |        |
|             |             |                            | 0°C to 100°C               | ±0.5°C                     |        |
|             |             |                            | -200°C to less than -100°C | ±1.4°C                     |        |
|             | 500°C f.s.  | 0.05°C                     | -100°C to less than 0°C    | ±0.7°C                     |        |
|             |             |                            | 0°C to 400°C               | ±0.5°C                     |        |
|             |             |                            | -200°C to less than -100°C | ±1.4°C                     |        |
| 2000°C f.s. | 0.1°C       | -100°C to less than 0°C    | ±0.7°C                     |                            |        |
|             |             | 0°C to 400°C               | ±0.5°C                     |                            |        |
|             |             | -200°C to less than -100°C | ±1.4°C                     |                            |        |
| N           | 100°C f.s.  | 0.01°C                     | -100°C to less than 0°C    | ±1.1°C                     |        |
|             |             |                            | 0°C to 100°C               | ±0.9°C                     |        |
|             |             |                            | -200°C to less than -100°C | ±2.1°C                     |        |
|             | 500°C f.s.  | 0.05°C                     | -100°C to less than 0°C    | ±1.1°C                     |        |
|             |             |                            | 0°C to 500°C               | ±0.9°C                     |        |
|             |             |                            | -200°C to less than -100°C | ±2.1°C                     |        |
| 2000°C f.s. | 0.1°C       | -100°C to less than 0°C    | ±1.1°C                     |                            |        |
|             |             | 0°C to 1300°C              | ±0.9°C                     |                            |        |
|             |             | -200°C to less than -100°C | ±2.1°C                     |                            |        |
| R           | 100°C f.s.  | 0.01°C                     | 0°C to 100°C               | ±4.4°C                     |        |
|             |             |                            | 0°C to less than 100°C     | ±4.4°C                     |        |
|             |             |                            | 100°C to less than 300°C   | ±2.9°C                     |        |
|             | 500°C f.s.  | 0.05°C                     | 300°C to 500°C             | ±2.2°C                     |        |
|             |             |                            | 0°C to less than 100°C     | ±4.4°C                     |        |
|             |             |                            | 100°C to less than 300°C   | ±2.9°C                     |        |
| 2000°C f.s. | 0.1°C       | 300°C to 1700°C            | ±2.2°C                     |                            |        |
|             |             | 0°C to less than 100°C     | ±4.4°C                     |                            |        |
|             |             | 100°C to less than 300°C   | ±2.9°C                     |                            |        |
| S           | 100°C f.s.  | 0.01°C                     | 0°C to 100°C               | ±4.4°C                     |        |
|             |             |                            | 0°C to less than 100°C     | ±4.4°C                     |        |
|             |             |                            | 100°C to less than 300°C   | ±2.9°C                     |        |
|             | 500°C f.s.  | 0.05°C                     | 300°C to 500°C             | ±2.2°C                     |        |
|             |             |                            | 0°C to less than 100°C     | ±4.4°C                     |        |
|             |             |                            | 100°C to less than 300°C   | ±2.9°C                     |        |
| 2000°C f.s. | 0.1°C       | 300°C to 1700°C            | ±2.2°C                     |                            |        |
|             |             | 0°C to less than 100°C     | ±4.4°C                     |                            |        |
|             |             | 100°C to less than 300°C   | ±2.9°C                     |                            |        |
| B           | 2000°C f.s. | 0.1°C                      | 400°C to less than 600°C   | ±5.4°C                     |        |
|             |             |                            | 600°C to less than 1000°C  | ±3.7°C                     |        |
|             |             |                            | 1000°C to 1800°C           | ±2.4°C                     |        |
| C           | 100°C f.s.  | 0.01°C                     | 0°C to 100°C               | ±1.7°C                     |        |
|             |             |                            | 0°C to 500°C               | ±1.7°C                     |        |
|             |             |                            | 0°C to 2000°C              | ±1.7°C                     |        |




Other specifications about thermocouple measurement

|                                                    |                                                                                                                             |
|----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Reference junction compensation: Internal/external | At INT RJC, total accuracy = add ± 0.5°C                                                                                    |
| Thermocouple burnout detection: ON/OFF             | System will check for burnout at each data refresh interval during thermocouple measurement. (10 ms interval not available) |

**U8550, U8551, U8552, LR8531 Only Input specifications**  
**Humidity** (use Humidity Sensor Z2000)

| Range        | Maximum resolution | Measurable range    |
|--------------|--------------------|---------------------|
| 100% rh f.s. | 0.1% rh            | 5.0% rh to 95.0% rh |

Humidity sensor Z2000 accuracy

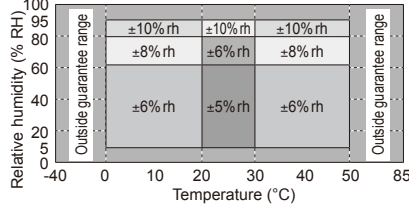

If the humidity value lies on a boundary line, the better of the two regions' measurement accuracy values applies.

**U8551, LR8531 Only Input specifications**

**Temperature** Connection: 3-wire/4-wire, Measurement current: 1 mA (Pt100, Jpt100), 0.1 mA (Pt1000)  
 Standards: Pt100, Pt1000: JIS C1604-2013, IEC751 JPt100: JIS C1604-1989

| Type   | Range       | Maximum resolution | Measurable range | Measurement accuracy |
|--------|-------------|--------------------|------------------|----------------------|
| Pt100  | 100°C f.s.  | 0.01°C             | -100°C to 100°C  | ±0.5°C               |
|        | 500°C f.s.  | 0.05°C             | -200°C to 500°C  | ±0.7°C               |
|        | 2000°C f.s. | 0.1°C              | -200°C to 800°C  | ±0.9°C               |
| JPt100 | 100°C f.s.  | 0.01°C             | -100°C to 100°C  | ±0.5°C               |
|        | 500°C f.s.  | 0.05°C             | -200°C to 500°C  | ±0.7°C               |
|        | 2000°C f.s. | 0.1°C              | -200°C to 500°C  | ±0.9°C               |
| Pt1000 | 100°C f.s.  | 0.01°C             | -100°C to 100°C  | ±0.5°C               |
|        | 500°C f.s.  | 0.05°C             | -200°C to 500°C  | ±0.7°C               |
|        | 2000°C f.s. | 0.1°C              | -200°C to 800°C  | ±0.9°C               |

\*When using Pt1000, data refresh intervals of 10ms, 20m, and 50ms are not available.

**Resistance**

Connection: 4-wire; measurement current: 1 mA

| Range      | Maximum resolution | Measurable range | Measurement accuracy |
|------------|--------------------|------------------|----------------------|
| 10 Ω f.s.  | 0.5 mΩ             | 0 Ω to 10 Ω      | ±10 mΩ               |
| 20 Ω f.s.  | 1 mΩ               | 0 Ω to 20 Ω      | ±20 mΩ               |
| 100 Ω f.s. | 5 mΩ               | 0 Ω to 100 Ω     | ±100 mΩ              |
| 200 Ω f.s. | 10 mΩ              | 0 Ω to 200 Ω     | ±200 mΩ              |

**HIGH SPEED VOLTAGE UNIT U8553** | **WIRELESS HIGH SPEED VOLTAGE UNIT LR8531**

(Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

**General specifications**

|                                          |                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of input channels                 | 5 (voltage only)                                                                                                                                                                                                                                                                                                                |
| Input terminals                          | M3 screw-type terminal block (2 terminals per channel), outfitted with terminal block cover                                                                                                                                                                                                                                     |
| Measurement target                       | Voltage                                                                                                                                                                                                                                                                                                                         |
| Input type                               | Scanning by semiconductor relays, all channels isolated                                                                                                                                                                                                                                                                         |
| A/D resolution                           | 16 bits                                                                                                                                                                                                                                                                                                                         |
| Maximum input voltage                    | ±100 V DC (maximum voltage between input terminals without causing damage)                                                                                                                                                                                                                                                      |
| Maximum channel-to-channel voltage       | 300 V DC (maximum voltage between input channels without causing damage)<br>*Channels are isolated from each other with semiconductor relays. Never allow a voltage exceeding the product specifications, for example a lightning surge, to be applied across channels as doing so may cause the semiconductor relays to short. |
| Maximum rated terminal-to-ground voltage | 300 V AC, DC (maximum voltage between input channel and chassis, or between modules, without causing damage)                                                                                                                                                                                                                    |
| Input resistance                         | 1MΩ±5%                                                                                                                                                                                                                                                                                                                          |
| Allowable signal source resistance       | 100Ω or less                                                                                                                                                                                                                                                                                                                    |
| Data refresh interval                    | 1 ms to 10 s (13 selectable levels)                                                                                                                                                                                                                                                                                             |
| Digital filters                          | Digital filter cutoff frequency is automatically set to data refresh interval, burnout detection setting, and power supply frequency filter setting.                                                                                                                                                                            |
| Dimensions                               | U8553: Approx. 134W×70H×63D mm (5.28"W×2.76"H×2.48"D)<br>LR8531: Approx. 154W×106H×57D mm (6.06"W×4.17"H×2.24"D)                                                                                                                                                                                                                |
| Mass                                     | U8553: Approx. 237g (8.4 oz.)<br>LR8531: Approx. 370g (13.1 oz.) (including Z3230 Wireless LAN Adapter)                                                                                                                                                                                                                         |

**Analog input specifications**

(23 ±5°C/73 ±9°F, 80% rh or less, after 30 minutes of warm-up and zero-adjustment, with the 50 Hz/60 Hz cut-off setting selected)

| Measurement target | Range       | Maximum resolution | Measurable range  | Measurement accuracy |
|--------------------|-------------|--------------------|-------------------|----------------------|
| Voltage            | 100 mV f.s. | 5 μV               | -100 mV to 100 mV | ±100 μV              |
|                    | 200 mV f.s. | 10 μV              | -200 mV to 200 mV | ±200 μV              |
|                    | 1 V f.s.    | 50 μV              | -1 V to 1 V       | ±1 mV                |
|                    | 2 V f.s.    | 100 μV             | -2 V to 2 V       | ±2 mV                |
|                    | 10 V f.s.   | 500 μV             | -10 V to 10 V     | ±10 mV               |
|                    | 20 V f.s.   | 1 mV               | -20 V to 20 V     | ±20 mV               |
|                    | 100 V f.s.  | 5 mV               | -100 V to 100 V   | ±100 mV              |
|                    | 1-5 V f.s.  | 500 μV             | 1 V to 5 V        | ±10 mV               |

**STRAIN UNIT U8554** | **WIRELESS STRAIN UNIT LR8534**

(Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

**General specifications**

|                                          |                                                                                                                                                                        |                                                                                                                                                                                                                                                |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of input channels                 | 5 (Set voltage or strain for each channel.)                                                                                                                            |                                                                                                                                                                                                                                                |
| Input terminals                          | Push-button type terminal block (5 terminals per channel), outfitted with terminal block cover<br>Set DIP switches according to measurement target.                    |                                                                                                                                                                                                                                                |
| Measurement target                       | Voltage                                                                                                                                                                | Strain                                                                                                                                                                                                                                         |
|                                          |                                                                                                                                                                        | Strain gage-type converter<br>Strain gage<br>1-gage method (2-wire setup), 1-gage method (3-wire setup), 2-gage method (adjacent sides), 4-gage method                                                                                         |
| Adaptive gage resistance                 | 1-gage method, 2-gage method: 120 Ω (external bridge box required for 350 Ω)<br>4-gage method: 120 Ω to 1 kΩ                                                           |                                                                                                                                                                                                                                                |
| Gage ratio                               | 2.0 (fixed)                                                                                                                                                            |                                                                                                                                                                                                                                                |
| Bridge voltage                           | 2 V ±0.05 V DC                                                                                                                                                         |                                                                                                                                                                                                                                                |
| Balance adjustment                       | Method                                                                                                                                                                 | Electronic auto-balancing                                                                                                                                                                                                                      |
|                                          | Range                                                                                                                                                                  | Voltage: ±20 mV or less (1 mV f.s. to 20 mV f.s. range), ±200 mV or less (50 mV f.s. to 200 mV f.s. range)<br>Strain: ±20,000 με or less (1000 με f.s. to 20,000 με f.s. range), ±200,000 με or less (50,000 με f.s. to 200,000 με f.s. range) |
| Input type                               | Balanced differential input, Simultaneous sampling of all channels (non-isolated channels)                                                                             |                                                                                                                                                                                                                                                |
| A/D resolution                           | 16bit                                                                                                                                                                  |                                                                                                                                                                                                                                                |
| Maximum input voltage                    | ±0.5 V DC (maximum voltage between input terminals without causing damage)                                                                                             |                                                                                                                                                                                                                                                |
| Maximum channel-to-channel voltage       | Non-isolated (all channels share common GND)                                                                                                                           |                                                                                                                                                                                                                                                |
| Maximum rated terminal-to-ground voltage | 30 Vrms AC or 60 V DC (maximum voltage between input channel and chassis without causing damage)                                                                       |                                                                                                                                                                                                                                                |
| Input resistance                         | 2 MΩ ±5%                                                                                                                                                               |                                                                                                                                                                                                                                                |
| Data refresh interval                    | 1 ms to 10 s (13 selectable levels)                                                                                                                                    |                                                                                                                                                                                                                                                |
| Low-pass filter                          | Cutoff frequency: -3 dB ±30%<br>Auto, 120, 60, 30, 15, 8, 4 (Hz)<br>Auto: Cutoff frequency of low-pass filter is automatically set based on set data refresh interval. |                                                                                                                                                                                                                                                |
|                                          | Attenuation characteristics: 5th-order Butterworth filter, -30 dB/oct                                                                                                  |                                                                                                                                                                                                                                                |
|                                          | Dimensions<br>U8554: Approx. 134W×70H×63D mm (5.28"W×2.76"H×2.48"D)<br>LR8534: Approx. 154W×106H×57D mm (6.06"W×4.17"H×2.24"D)                                         |                                                                                                                                                                                                                                                |
| Mass                                     | U8554: Approx. 236g (8.3 oz.)<br>LR8534: Approx. 372g (13.1 oz.) (including Z3230 Wireless LAN Adapter)                                                                |                                                                                                                                                                                                                                                |

**Analog input specifications**

(23 ±5°C/73 ±9°F, 80% rh or less, auto-balance at least 30 minutes after power on, with LPF set at 4 Hz)

| Measurement target | Range       | Maximum resolution        | Measurable range          | Measurement accuracy  |        |
|--------------------|-------------|---------------------------|---------------------------|-----------------------|--------|
| Voltage            | 1 mV f.s.   | 50 nV                     | -1 mV to 1 mV             | ±9 μV                 |        |
|                    | 2 mV f.s.   | 100 nV                    | -2 mV to 2 mV             | ±10 μV                |        |
|                    | 5 mV f.s.   | 250 nV                    | -5 mV to 5 mV             | ±25 μV                |        |
|                    | 10 mV f.s.  | 500 nV                    | -10 mV to 10 mV           | ±50 μV                |        |
|                    | 20 mV f.s.  | 1 μV                      | -20 mV to 20 mV           | ±100 μV               |        |
|                    | 50 mV f.s.  | 2.5 μV                    | -50 mV to 50 mV           | ±250 μV               |        |
|                    | 100 mV f.s. | 5 μV                      | -100 mV to 100 mV         | ±500 μV               |        |
|                    | 200 mV f.s. | 10 μV                     | -200 mV to 200 mV         | ±1 mV                 |        |
|                    | Strain      | 1,000 με f.s.             | 0.05 με                   | -1,000 με to 1,000 με | ±9 με  |
|                    |             | 2,000 με f.s.             | 0.1 με                    | -2,000 με to 2,000 με | ±10 με |
| 5,000 με f.s.      |             | 0.25 με                   | -5,000 με to 5,000 με     | ±25 με                |        |
| 10,000 με f.s.     |             | 0.5 με                    | -10,000 με to 10,000 με   | ±50 με                |        |
| 20,000 με f.s.     |             | 1 με                      | -20,000 με to 20,000 με   | ±100 με               |        |
| 50,000 με f.s.     |             | 2.5 με                    | -50,000 με to 50,000 με   | ±250 με               |        |
| 100,000 με f.s.    |             | 5 με                      | -100,000 με to 100,000 με | ±500 με               |        |
| 200,000 με f.s.    | 10 με       | -200,000 με to 200,000 με | ±1000 με                  |                       |        |

\* Internal bridge resistance precision tolerance: ±0.01%; temperature characteristics: ±2 ppm/°C  
 \* Measurement accuracy does not include internal bridge resistance tolerance and temperature characteristics

**Model: MEMORY HiLOGGER LR8450**



| Model No. (Order code) | Specifications                              |
|------------------------|---------------------------------------------|
| LR8450                 | Standard model, main unit only              |
| LR8450-01              | Wireless LAN equipped model, main unit only |

- The LR8450 and LR8450-01 cannot perform measurement on their own. One or more plug-in units or wireless units are required (sold separately).
- The LR8450-01 and each wireless unit emit radio waves. Use of radio waves is subject to licensing requirements in certain countries. Using it in a country or region other than those indicated may violate the law and may result in legal penalties for the operator. For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.

**Option**

**Plug-in units**



**VOLTAGE/TEMP UNIT U8550**  
Channels: 15; maximum sampling rate: 10 ms



**UNIVERSAL UNIT U8551**  
Channels: 15; maximum sampling rate: 10 ms



**VOLTAGE/TEMP UNIT U8552**  
Channels: 30; maximum sampling rate: 20 ms  
(When 15 or fewer channels are used, 10 ms)



**HIGH SPEED VOLTAGE UNIT U8553**  
Channels: 5; maximum sampling rate: 1 ms



**STRAIN UNIT U8554**  
Channels: 5; maximum sampling rate: 1 ms

**Wireless units**



**WIRELESS VOLTAGE/TEMP UNIT LR8530**  
Channels: 15; maximum sampling rate: 10 ms



**WIRELESS UNIVERSAL UNIT LR8531**  
Channels: 15; maximum sampling rate: 10 ms



**WIRELESS VOLTAGE/TEMP UNIT LR8532**  
Channels: 30; maximum sampling rate: 20 ms  
(When 15 or fewer channels are used, 10 ms)



**WIRELESS HIGH SPEED VOLTAGE UNIT LR8533**  
Channels: 5; maximum sampling rate: 1 ms



**WIRELESS STRAIN UNIT LR8534**  
Channels: 5; maximum sampling rate: 1 ms

**Power supply**

For instrument and wireless units



**BATTERY PACK Z1007**

Instrument takes two; wireless units take one.

For instrument



**AC ADAPTER Z1014**

Ships standard with LR8450/LR8540-01.

For wireless units



**AC ADAPTER Z1008**

Ships standard with wireless units.

**Fixed Stand**



**FIXED STAND Z5040**

For installing logger on wall

**CASE**



**CARRYING CASE C1012**

Accommodates instrument and four plug-in units or seven wireless units.

**Wireless Lan Adapter**

For wireless units



**WIRELESS LAN ADAPTER Z3230**

Ships standard with wireless units.

**Cables, sensors, etc.**



**LAN CABLE 9642**

Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft) length



**HUMIDITY SENSOR Z2000**

(Analog output), 3 m (9.84 ft) length



**Thermocouple**

For reference only. Please purchase locally.

**Storage media**

\*Always use HIOKI optional storage media. Proper operation is not guaranteed when using storage media from other manufacturers, and may prevent the product from saving and loading data properly.



**SD memory card Z4001**

2 GB capacity



**SD memory card Z4003**

8 GB capacity



**USB drive Z4006**

16 GB, Long-life, High-reliability SLC Flash Memory

*Note: Company names and product names appearing in this catalog are trademarks or registered trademarks of various companies.*



DISTRIBUTED BY

Test Equipment Depot - 800.517.8431 - 99 Washington Street Melrose, MA 02176

TestEquipmentDepot.com