




## FLIR i3

Thermal imaging camera for building inspections

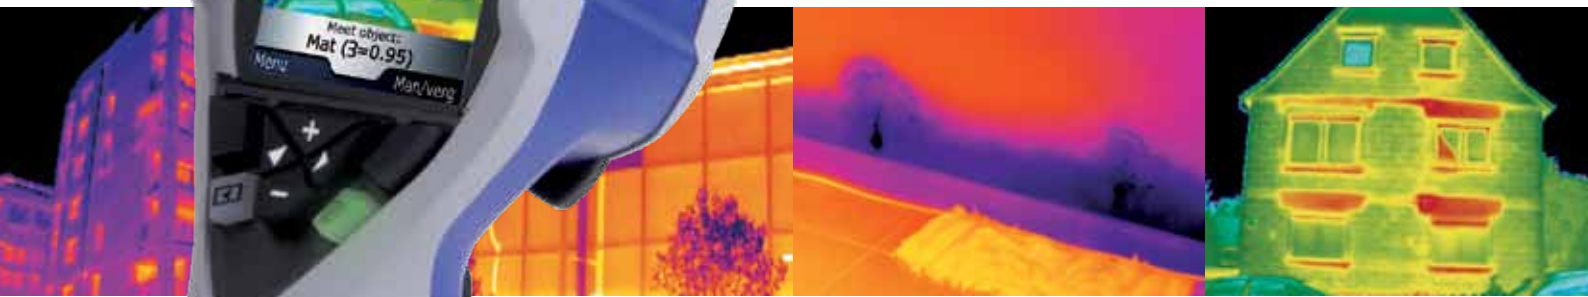

**NEW FLIR i3: £ 895 *excl. VAT*  
REVOLUTIONARY PRICE!**

The FLIR i3 is a revolutionary thermal imaging camera. It is incredibly easy-to-use and requires no former experience. With a price of only £ 895 the FLIR i3 will find its way to many building inspectors.



Easy to use



Fully automatic



Focus free



Compact



Image storage on SD card



Reporting software included

## Technical specifications



### Imaging performance

Spectral range	7.5 - 13 $\mu$ m
Spatial resolution (IFOV)	3.7 mrad
Image Frequency	9 Hz
Field of view/min focus distance	12.5° x 12.5°/0.6 m
Thermal sensitivity	< 0.15°C
IR Resolution	60 x 60 pixels
Focus	Fixed
Focal Plane Array (FPA)	Uncooled microbolometer

### Image Presentation

Display	2.8" color LCD
---------	----------------

### Measurement

Object temperature range	-20°C to +250°C
Measurement modes	Center spot
Accuracy	$\pm$ 2 °C or $\pm$ 2% of reading

### Measurement analysis

Emissivity correction	Variable from 0.1 to 1.0 or selected from list of materials
Reflected apparent temperature correction	Automatic, based on input of reflected temperature

### Setup

Color palettes	Iron, Rainbow and Black/White
Set-up controls	Local adaptation of units, language, date and time formats; automatic shutdown

### Image Storage

Type	MiniSD card
File format	Standard JPEG - 14 bit measurement data included

### Power

Battery Type	Li-Ion rechargeable
Battery operating time	5 hours , display shows battery status
Charging system	In camera, AC adaptor; 3 hours to 90% capacity
AC operation	AC adaptor 90-260 VAC input
Power management	Automatic shutdown (user selectable)
Adaptor voltage	5 VDC out

### Environmental specifications

Operating temperature range	0°C to +50°C
Storage temperature range	-40°C to +70°C
Humidity	Operating and storage IEC 60068-2-30/24 h 95% relative humidity
Shock	25G, IEC 60068-2-29
Vibration	2G, IEC 60068-2-6
Encapsulation	Camera housing and lens: IP43

### Physical characteristics

Dimensions	223 x 79 x 83 mm
Weight	<340g, including battery
Shipping size	120 x 400 x 320 mm
Shipping weight	2.8 kg

### Standard package

FLIR i3 thermal imaging camera, Hard transport case, FLIR QuickReport CD, Printed Getting Started Guide, User documentation CD-ROM, Calibration certificate, Hand strap, Battery (inside camera), Power supply/charger with EU, UK, US and Australian plugs, USB cable, miniSD card, with SD card adaptor

### FLIR Commercial Systems B.V.

Charles Petitweg 21  
4847 NW Breda  
The Netherlands  
Tel. : +31 (0) 765 79 41 94  
Fax : +31 (0) 765 79 41 99  
e-mail: flir@flir.com

### FLIR Systems Sweden

Tel.: +46 (0)8 753 25 00  
Fax: +46 (0)8 755 07 52  
e-mail: flir@flir.com  
www.flir.com

### FLIR Systems Germany

Tel.: +49 (0)69 95 00 900  
Fax: +49 (0)69 95 00 9040  
e-mail: flir@flir.com

### FLIR Systems France

Tel: +33 (0)1 60 37 01 00  
Fax: +33 (0)1 64 11 37 55  
e-mail: flir@flir.com

### FLIR Systems UK

Tel.: +44 (0)1732 220 011  
Fax: +44 (0)1732 843 707  
e-mail: flir@flir.com

### FLIR Systems Italy

Tel.: +39 (0)2 99 45 10 01  
Fax: +39 (0)2 99 69 24 08  
e-mail: flir@flir.com

### FLIR Systems Belgium

Tel.: +32 (0)3 287 87 10  
Fax: +32 (0)3 287 87 29  
e-mail: flir@flir.com

### FLIR Systems Dubai

Tel.: + 971 4 299 6898  
Fax: + 971 4 299 6895  
e-mail: flir@flir.com

### FLIR Systems Russia

Tel.: + 7 495 785 37 97  
Fax: + 7 495 785 37 81  
e-mail: flir@flir.com

### FLIR Systems Spain

Tel.: +34 (91) 662 94 01  
Fax: +34 (91) 662 97 48  
e-mail: flir@flir.com

[www.flir.com](http://www.flir.com)

Specifications are subject to change without notice.

Weights and dimensions are indicative. Imagery used for illustration purposes only.

Copyright 2011, FLIR Systems Inc. All other brand and product names are trademarks of their respective owners.