

TECHNICAL DATA

Fluke i3000s Flex-36 AC Current Clamp, 915 mm (36 in.)



Key features

- Three ranges
 - 30 A
 - 300 A
 - 3000 A, 1, 10 or 100 mV/A output
- Ideal for current measurement on thick and hard to reach conductors without breaking the circuit
- Maximum conductor diameter 178 mm (7 in.)
- CAT III 600 V safety rating

Also available in pack of 4 for use in Power Quality Analyzers. [Click here](#) for more info.

Product overview: Fluke i3000s Flex-36 AC Current Clamp, 915 mm (36 in.)


The i3000s Flex is an ac current clamp utilizing the Rogowski principle. It can be used to measure currents up to 3000 A when used in conjunction with oscilloscopes, recorders or data loggers. The flexible and lightweight measuring head allows quick and easy installation in hard to reach areas.

Specifications: Fluke i3000s Flex-36 AC Current Clamp, 915 mm (36 in.)

Electrical Specification	
Current ranges	30 A
	300 A
	3000 A
	AC rms
Output sensitivity (AC-coupled)	100 mV
	10 mV
	1mV per A
Load impedance	100 kΩ minimum
Accuracy	at +25°C: ±1% of range (45 Hz to 65 Hz)
Linearity	10% to 100% of range: ±0.2% of reading
Noise	8 mV AC rms (30 A)
	2 mV AC rms (300 A, 3000 A)
Frequency range	10 Hz to 50 kHz (-3 dB)
Phase error	< ±1° (45 Hz to 65 Hz)
	±10° (at 20 kHz)
Position sensitivity	with cable > 25 mm from the coupling: ±2% of range
External field	with cable > 200 mm from the head: ±1% of range
Power supply	2 x AA/MN 1500/LR6 Alkaline, 400 hours, low battery indicator
Temperature coefficient	±0.08% of reading per °C
Working voltage	see Safety standards section: 600 V AC rms or DC
General Specifications	
Head circumference	915 mm (36 in.)
Head cable diameter	14.3 mm (0.56 in)
Head bend radius	38.1 mm (1.5 in)
Cable length (head to electronics)	2 m (6.56 ft)
Output connection	0.5 m cable terminated with safety BNC connector. Supplied with 4mm safety plug adapter
Operating temperature range	-20°C to +90°C (-4°F to 190°F) (head)
	-20°C to +85°C (-4°F to 185°F) (electronics)
Storage temperature range	-40°C to +105°C (-40°F to 221°F) (head)
	-20°C to +85°C (-4°F to 185°F) (electronics)
Operating humidity	15% to 85% (non-condensing)

Weight	180 g (0.396 lb) (head)
	190 g (0.419 lb) (electronics)
Safety standards	BS EN 61010-1: 2001
	BS EN 61010-2-032: 2002
	BS EN 61010-031: 2002
	600 Vrms, Category III, Pollution Degree 2
	Use of the probe on uninsulated conductors is limited to 600 V AC rms or DC and frequencies below 1 kHz
EMC standards	EN 61326: 1998 +A1, A2, and A3
Head cable length (double insulated)	610 mm or 914 mm, depending on model

Ordering information

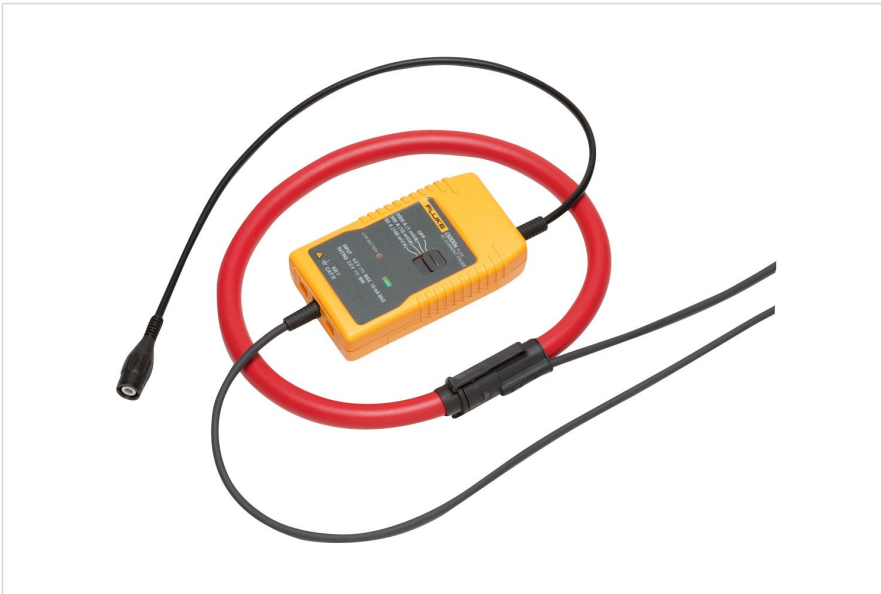

Fluke i3000s Flex 36

AC Current Clamp, 915 mm (36 in.)

Fluke. *Keeping your world up and running.®*

Fluke Corporation
PO Box 9090, Everett, WA 98206 U.S.A.

For more information call:
In the U.S.A. (800) 443-5853
In Canada (800) 36-FLUKE
From other countries +1 (425) 446-5500
www.fluke.com

©2022 Fluke Corporation.
Specifications subject to change without notice.
02/2022

**Modification of this document is not permitted
without written permission from Fluke Corporation.**